



ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: 666 Xiangfu Road,  
Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755  
Fax: +86-571-88926789 88132890

sales@hcforklift.com  
www.hcforklift.com



Follow us on  
Facebook



Follow us on  
YouTube



Follow us on  
WeChat



Download "Hangcha  
Forklift" App



ISO14001  
ISO14001:2015



ISO9001  
ISO9001:2015



HANGCHA trucks conform  
to the European Safety  
Requirements.

2023 VERSION 2 / COPYRIGHT 2023 / 04

HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



# XC SERIES REACH TRUCK WITH LITHIUM POWER

with capacity of 1,400 to 2,500kg



The World of Hangcha  
SINCE 1956



# A NEW DIMENSION OF PERFORMANCE

## XC SERIES REACH TRUCK WITH LITHIUM POWER

- / The XC series reach truck with lithium power fully utilize the advantages of lithium battery and achieve disruptive innovations in vehicle structure, functional configuration, performance parameters, ergonomics, and operating vision.
- / We cater for a wide range of applications whilst ensuring optimum energy efficiency. Regardless of your special requirements – whether confined spaces or lifting height reaches 13m, load capacity of up to 2,500 kg or individual customisation with various options – we have the truck you need.
- / Compact size of the lithium battery pack and breaking through the traditional structure design, makes the truck style more novel and more efficient.

MAXIMUM TRAVELLING SPEED

**14km/h**

MAXIMUM LIFTING SPEED

**0.81m/s**

HIGH RESIDUAL CAPACITY

**6,500mm**

MAXIMUM LOAD CAPACITY

**2,500kg**

MAXIMUM LIFT HEIGHT

**13,000mm**





# BEING ENVIRONMENTALLY FRIENDLY, EFFICIENT AND DURABLE


- / CATL lithium battery is standard for all series, adopting 80V voltage system which can provides fast charging and long service life and less energy loss.
- / The special-shaped lithium battery pack design provides a large operating space in the cab and a broad view.



Charging port



Battery removal

 Working time **> 10h**

 Fast charging time **≤ 2h**

Lithium battery capacity		
1.4 t	Std.	80V/250Ah
1.6 t		
1.8 t		
2.0 t	Opt.	80V/404Ah
2.5 t		

Note: Std. 80V/250Ah, Work time > 6h;  
Opt. 80V/404Ah, Work time >10h





# A NOVEL PROFILE STYLE AND COMPACT INTERIOR DESIGN

With fewer exposed fasteners of the inside covers, the interior is compact and stylish.




Thanks to the special-shaped design of the battery pack and the breakthrough in the body structure, which can provide a wider view.



## The improved mast structure and piping arrangement enables a broader vision for stacking operations

/ The hydraulic tubing and the wires are on both sides of the mast, overlapping with the chain, making full use of the space and reducing the line of sight.

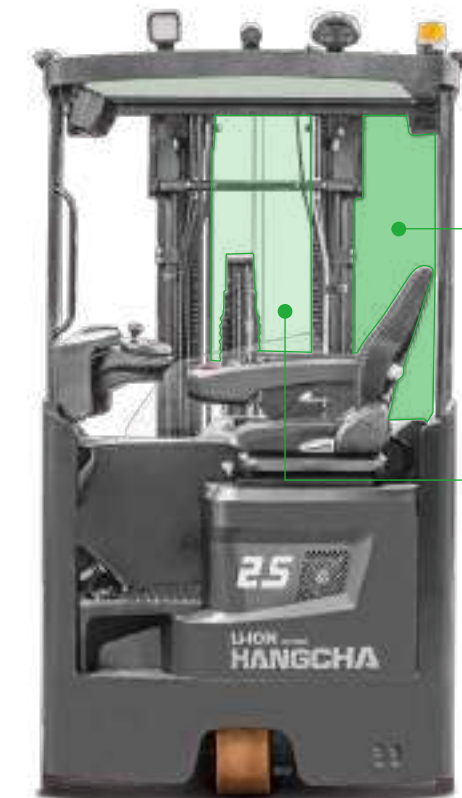

The compact mast design enables operator have a wider view around the outside of the mast.

The middle cylinder is arranged eccentrically to enable the driver to have a wider view around the inside of the mast.



# EXCELLENT ERGONOMIC DESIGN

Dashboard angle adjustment

Control with a fingertip switch



Steering wheel position can also be adjusted



The pedal height can be adjusted electrically

Integral suspended seat



# MULTIFUNCTIONAL INTERACTIVE COLOR-SCREEN INSTRUMENTS

The new multifunctional 4.3 inch color-screen instruments developed for the XC series reach truck have easier human-machine interfaces.



## More status indication



- 1**  
1. Lifting height  
2. Local time  
3. Load weight
- 2**  
1. Driving mode  
2. Fork action  
3. Operating time  
4. Maximum allowable lifting height
- 3**  
1. Steering mode  
2. Battery power  
3. Travelling speed
- 4**  
Various status signs and warning signs are displayed in a queue according to actual needs

## More convenient shortcut button

Thanks to the integrated design of the instrument function buttons, the truck console saves a lot of physical buttons, making it more concise and efficient.



- 5**  
Height selection
- 6**  
Height limit
- 7**  
Lighting control
- 8**  
Battery removal
- 9**  
Optional function switching screen
- 10**  
↑ Button Driving mode switching
- 11**  
↓ Button Turtle speed mode




# COMPREHENSIVELY IMPROVED FUNCTION CONFIGURATION




## Height selection

Multiple heights can be pre-set on the instrument. After the function is enabled, when the fork is about to be lifted to the preset height, the lifting speed will gradually slow down and the fork will finally stop at the set height steadily.

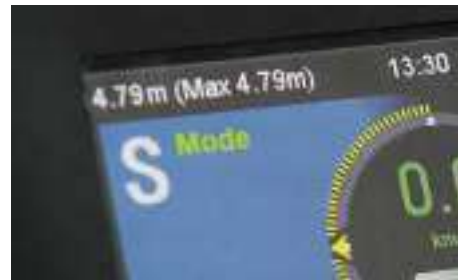


## Height limit

After this function is enabled, when the fork is lifted to a certain height, this height will be set as the maximum allowable lifting height. Afterwards, whenever the fork is about to be lifted to this height, the lifting speed will gradually slow down and the fork will steadily finally stop at this height.

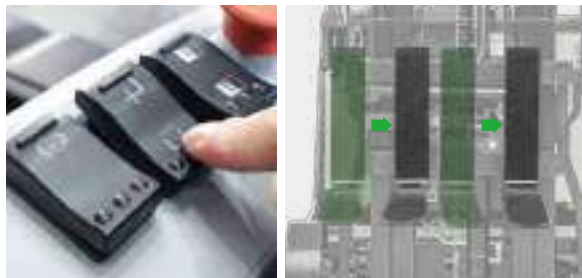

## Central sideshift

Simple, reliable and fast: The central positioning of the sideshift occurs automatically, eliminating the time-consuming, cautious approach of the required position. (Only for fingertip system)

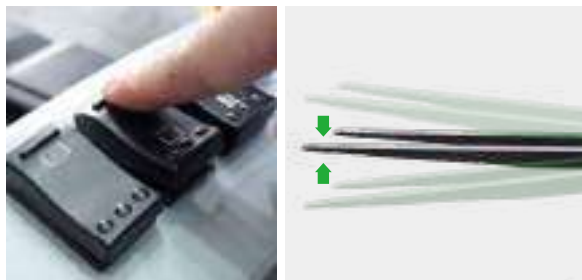


## Horizontal fork

Particularly at high lift heights, the forks' tilt position is often very hard to detect. The automatic horizontal positioning significantly simplifies and accelerates pallet entry. (Only for fingertip system)



**Faster, easier and safer stacking and retrieval operations**

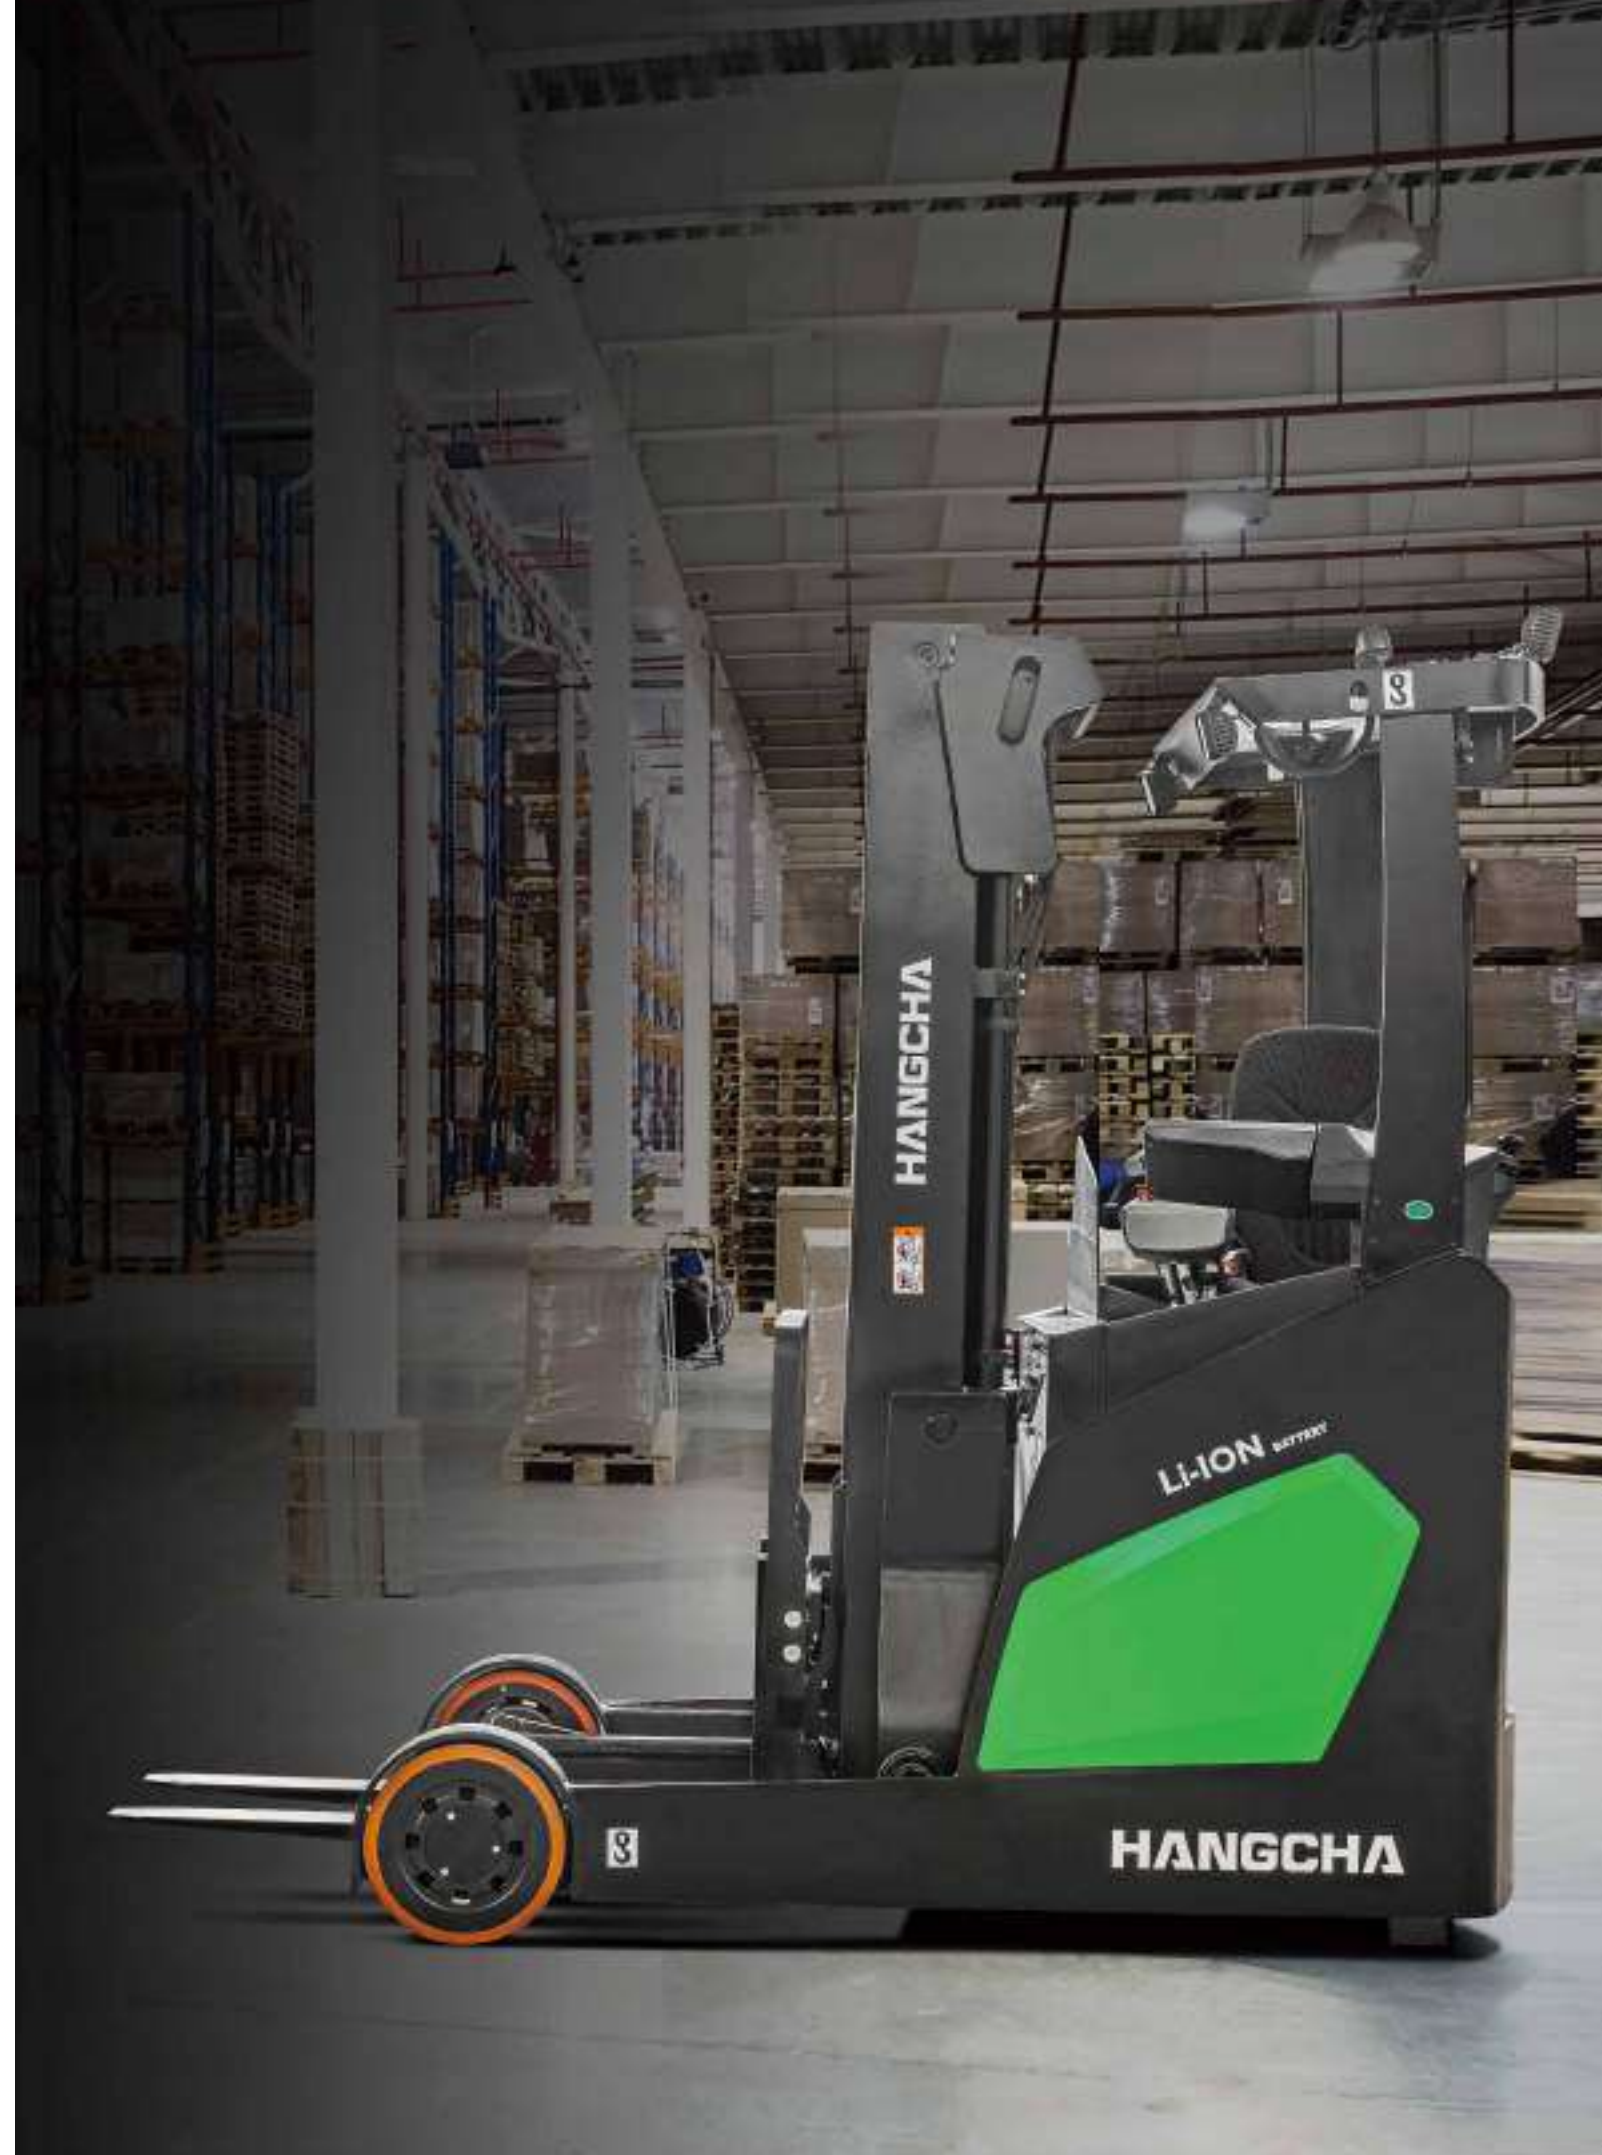




# SAFETY FROM EVERY ANGLE


## Drive control limit

Drive control limits the travelling speed and traverse speed as soon as the forks are raised. This increases the safety when manoeuvring with a raised pallet in front of the storage rack, while still ensuring more sensitive manoeuvring during the work cycle.

Traverse speeds (mm/s)

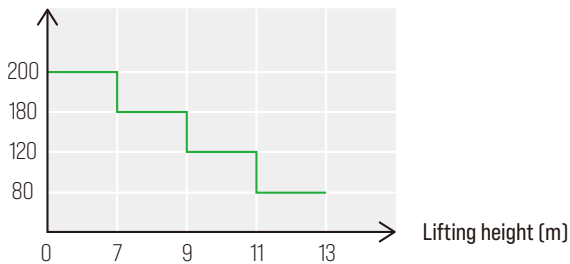


Travelling speed (km/h)

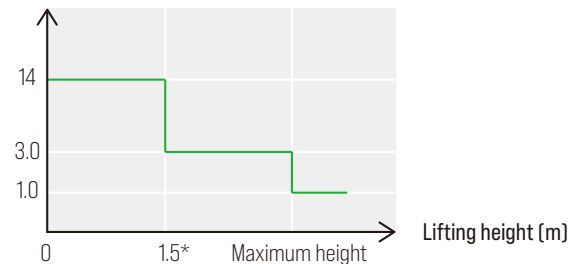

**Note:** The above table is only for 2.0/2.5t, the parameters of other models are not the same.

\*: 1.5m is only for the fingertip system. The parameter of mechanical control system is the height of free lift.



The battery is in an inappropriate position and the indicator light is lit

## Battery lock with creep speed interlock

Installed on the battery latch in the motor compartment. Monitors the locking of the battery pack. If the battery pack is not retracted or not locked, travel is restricted to creep speed.





# EASY MAINTENANCE

The battery pack can be replaced quickly. The driver can unlock and remove the battery while sitting on his seat.



Remove battery pack step



The hood can be easily dismantled and mounted to facilitate routine maintenance operations.



The seat can be turned open at a large angle, which is convenient for maintenance work.

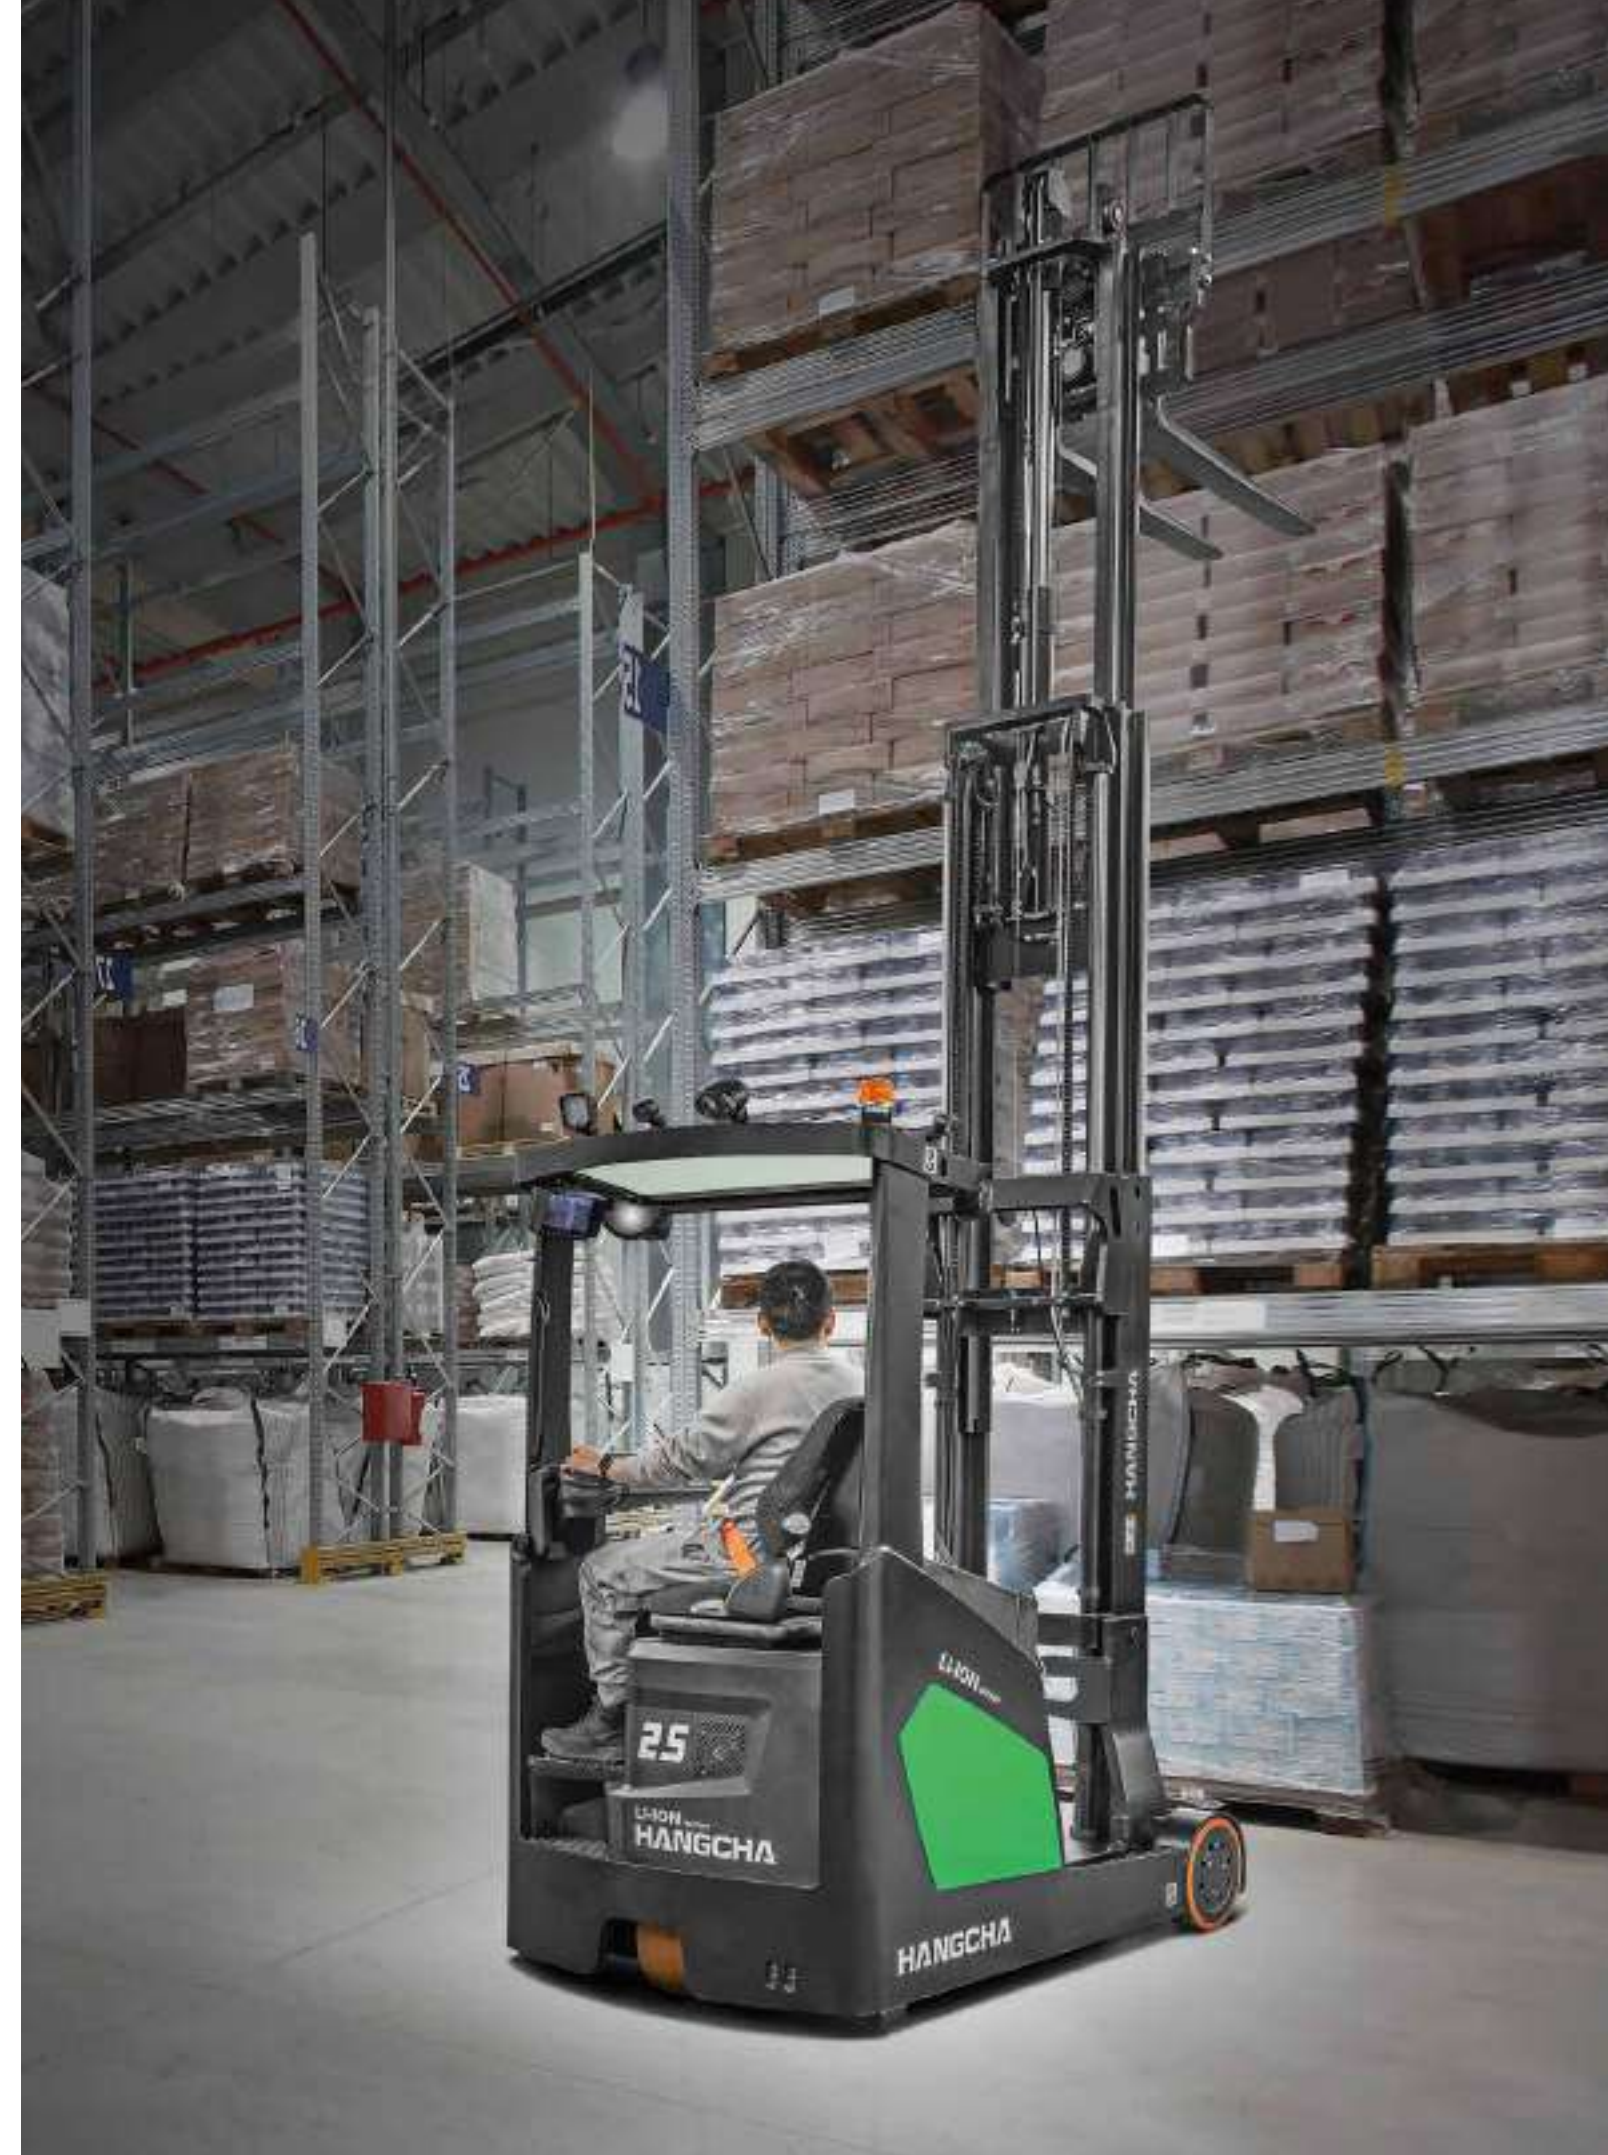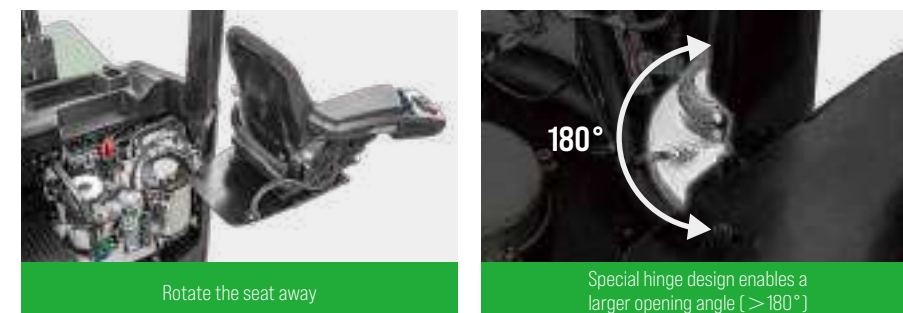



# XC Series Reach Truck With Lithium Power Specification

Distinguishing mark	HANGCHA GROUP CO.,LTD.							
	1.1	Manufacturer		CQD14-XC5-SI* CQD14-XC5D-SI*	CQD16-XC5-SI* CQD16-XC5D-SI*	CQD18-XC5-SI* CQD18-XC5D-SI*	CQD20-XC5-SI* CQD20-XC5D-SI*	CQD25-XC5-SI* CQD25-XC5D-SI*
Distinguishing mark	1.2	Model		Seated	Seated	Seated	Seated	Seated
	1.3	Power unit		Li-ION battery	Li-ION battery	Li-ION battery	Li-ION battery	Li-ION battery
	1.4	Manual		Seated	Seated	Seated	Seated	Seated
	1.5	Rated capacity/rated load	Q(t)	1.4	1.6	1.8	2	2.5
	1.6	Load centre distance	c(mm)	600	600	600	600	600
	1.8	Load distance	x(mm)	360 <sup>[17][10]</sup>	410 <sup>[17][10]</sup>	385 <sup>[8]</sup>	362 <sup>[20]</sup>	484 <sup>[20]</sup>
	1.8.1	Load distance, mast reached forward	x1(mm)	211 <sup>[2]</sup>	211 <sup>[2]</sup>	203	232	232
	1.9	Wheelbase	y(mm)	1355	1405	1405	1471	1601
	Weight	2.1	Net weight incl. battery (see row 6.5)	(kg)	3330	3370	3370	3470
3.1		Tyres		PU	PU	PU	PU	PU
Tyres, chassis	3.2	Tyre size, front		φ343×140	φ343×140	φ343×140	φ343×140	φ400×160
	3.3	Tyre size, rear		φ285×100	φ285×100	φ285×100	φ343×108	φ343×108
	3.5	Wheels, number front/rear (x = driven wheels)		1x/2	1x/2	1x/2	1x/2	1x/2
	3.7	Tread width, rear	b1(mm)	1174	1174	1174	1162	1162
	Dimensions	4.1	Tilt of fork carriage forward/backward	α/β(°)	2.0/5.0	2.0/5.0	2.0/5.0	2.0/5.0
4.2		Height, mast lowered	h1(mm)	2100	2100	2100	2100	2100
4.3		Free lift	h2(mm)	105	105	110	110	110
4.4		Lift	h3(mm)	3000	3000	3000	3000	3000
4.5		Height, mast extended	h4(mm)	3965	3965	3965	3965	3965
4.7		Height of overhead guard	h6(mm)	2263	2263	2263	2263	2263
4.8		Seat height	h7(mm)	1159	1159	1159	1159	1159
4.10		Height of support arms	h8(mm)	308	308	308	365.5	365.5
4.19		Overall length	h(mm)	2400 <sup>[3][12]</sup>	2400 <sup>[3][12]</sup>	2425 <sup>[7]</sup>	2514 <sup>[21]</sup>	2542 <sup>[21]</sup>
4.20		Length to face of forks	l2(mm)	1250 <sup>[3][12]</sup>	1250 <sup>[3][12]</sup>	1275 <sup>[7]</sup>	1364 <sup>[23]</sup>	1392 <sup>[23]</sup>
4.21		Overall width	b1/b2(mm)	1270/1270	1270/1270	1270/1270	1270/1270	1270/1270
4.22		Fork dimensions	s/e/l(mm)	35×120×1150	35×120×1150	40×122×1150	40×122×1150	40×122×1150
4.23		Fork carriage ISO 2328, class/type A, B		II A	II A	II A	II A	II A
4.24		Fork-carriage width	b3(mm)	830	830	830	830	830
4.25		Distance between fork-arms	b5(mm)	750	750	750	750	750
4.26		Distance between wheel arms	b4(mm)	940	940	940	940	940
4.28		Reach distance	l4(mm)	571 <sup>[4][13]</sup>	621 <sup>[4][13]</sup>	588 <sup>[8]</sup>	594 <sup>[20]</sup>	716 <sup>[20]</sup>
4.32		Ground clearance, centre of wheelbase	m2(mm)	80	80	80	80	80
4.33		Aisle width for pallets 1000 × 1200 sideways	Aa1(mm)	2687 <sup>[5][14]</sup>	2701 <sup>[5][14]</sup>	2719 <sup>[8]</sup>	2802 <sup>[22]</sup>	2867 <sup>[24]</sup>
4.34		Aisle width for pallets 800 × 1200 lengthways	Aa1(mm)	2740 <sup>[6][15]</sup>	2745 <sup>[6][15]</sup>	2768 <sup>[8]</sup>	2855 <sup>[23]</sup>	2896 <sup>[25]</sup>
4.35		Turning radius	Wa(mm)	1610	1660	1660	1726	1876
4.37		Length over the support arms	l1(mm)	1775	1825	1825	1920	2070
Performance data		5.1	Travel speed, laden/unladen	(km/h)	14/14	14/14	14/14	14/14
	5.2	Lift speed, laden/unladen	(m/s)	0.61/0.81	0.59/0.81	0.5/0.7	0.48/0.7	0.45/0.7
	5.3	Lowering speed, laden/unladen	(m/s)	XC4-0.52/0.52	XC4-0.52/0.52	XC4-0.52/0.52	XC4-0.52/0.52	XC4-0.52/0.52
				XC4D-0.56/0.56	XC4D-0.56/0.56	XC4D-0.56/0.56	XC4D-0.56/0.56	XC4D-0.56/0.56
	5.4	Traverse speed w. / w.o. load	(m/s)	0.24/0.24	0.24/0.24	0.2/0.2	0.2/0.2	0.2/0.2
	5.8	Max.gradeability, laden/unladen 5min	(%)	10.0/15.0	10.0/15.0	10.0/15.0	10.0/15.0	10.0/15.0
5.10	Service brake		Electromagnetic	Electromagnetic+Mech.	Electromagnetic+Mech.	Electromagnetic+Mech.	Electromagnetic+Mech.	
Electric-engine	6.1	Drive motor rating S2 60 min.	(kW)	8.1	8.1	8.1	8.1	8.1
	6.2	Lift motor rating at S3 15%	(kW)	20	20	20	20	20
	6.3	Battery as per DIN 43531 /35/36 A, B, C, no		no	no	no	no	no
	6.4	Battery voltage, nominal capacity	(V/Ah)	80/250	80/250	80/250	80/250	80/250
	6.4.1	Battery voltage, rated capacity, Optional	(V/Ah)	80/404	80/404	80/404	80/404	80/404
6.5	Battery weight (+5%)	(kg)	275	275	275	360	360	
Addition data	10.1	Operating pressure for attachments	(bar)	150	150	150	150	150
	10.2	Oil flow for attachments	(l/min)	18	18	18	18	18
	10.7	Sound pressure level LpAZ (at the driver's seat)	(db(A))	68	68	68	68	68

Note: 1) h3>7000mm:-25mm. 2) h3>7000mm:-8mm. 3) h3>7000mm:+25mm. 4) h3>7000mm:-33mm. 5) h3>7000mm:+19mm. 6) h3>7000mm:+23mm. 7) With optional battery 80V/404Ah,h3>7000mm:-90mm.  
 8) With optional battery 80V/404Ah, h3>7000mm: +90mm. 9) With optional battery 80V/404Ah, h3>7000mm: +68mm. 10) With optional battery 80V/404Ah, h3>7000mm: +82mm. 11) With optional battery 80V/404Ah,h3>7000mm:-115mm.  
 12) With optional battery 80V/404Ah, h3>7000mm: +115mm. 13) With optional battery 80V/404Ah, h3>7000mm: -123mm. 14) With optional battery 80V/404Ah, h3>7000mm: +87mm. 15) With optional battery 80V/404Ah, h3>7000mm: +105mm.  
 16) With optional battery 80V/404Ah:-90mm. 17) With optional battery 80V/404Ah: +90mm. 18) With optional battery 80V/404Ah: +67mm. 19) With optional battery 80V/404Ah: +81m. 20) h3>12000mm:-150mm. 21) h3>12000mm:+150mm.  
 22) h3>12000mm:+115mm. 23) h3>12000mm:+137mm. 24) h3>12000mm:+105mm. 25) h3>12000mm:+134mm;  
 ★ CE model

# Features

NO.	System	Features	CQD14/16/18/20/25-XC5-SI*	CQD14/16/18/20/25-XC5D-SI*
1	Control	Control with a mechanical control lever	●	/
2		Control with a fingertip switch	/	●
3		Height display	○ (Only for triplex mast, excluding the free lift range)	● (Including the free lift range)
4		Height selection	○ (Only for triplex mast, excluding the free lift range)	● (Including the free lift range)
5		Height limit	○ (Only for triplex mast, excluding the free lift range)	● (Including the free lift range)
6		Central sideshift	/	○
7		Horizontal fork alignment	/	○
8		Mast reach damping system	●	●
9		Electric lowering limit - Stop forks above outriggers if mast is retracted	○	○
10		Soft landing system	/	○
11		Lifting damping system	●	●
12		Drive control limit	●	●
13		Drive wheel skid control system	○	○
14		Battery lock with creep speed interlock	●	●
15		Travelling speed control at corner	●	●
16		180° steering mode	●	●
17		360° steering mode	○	○
18	Transmission system	ZF transmission	●	●
19	Electronic accessories	USB power socket	●	●
20		Fork positioning laser	○	○
21		Video monitoring	○	○
22		Keyed start	●	●
23		Start with a PIN code or by a card	○	○
24		Beep	○	○
25		Operating light (in the direction of the fork)	●	●
26		Operating light (in the reverse direction of the fork)	○	○
27		Alarm light	●	●
28		Blue light	○	○
29	Three-sided one line laser projection light	○	○	
30	Ergonomic design	Electrical adjustment of pedal height	○	○
31		Adjustable steering wheel	●	●
32	Instrument angle adjustment	●	●	
33	Fault Diagnosis	Suctioned oil filter clogging alarm	○	○
34		Backflow oil filter clogging alarm	○	●
35	Seat	Sequential Seat Belt Interlock System	●	●
36		BF6-3 suspension seat	●	/
37		MS665/522 suspension seat	○	●
38	Other	Panorama roof	○	○
39		PVC ceiling	○	○
40		Curved rearview mirror	○	○
41		Left and right rear view mirrors	○	○
42		Cold storage	○	○
43		Load backrest	●	●
44		Fire extinguisher	○	○
45		Electric fan	○	○
46	OPS system	●	●	

Note: ● Standard; ○ Optional  
 ★ CE model



### 1.4/1.6t Mast Specification

Type	Lifting height h <sub>3</sub>	Mast lowered h <sub>1</sub>	Mast extended h <sub>4</sub>	Free lifting height h <sub>2</sub>	Tilting range α/β
	mm	mm	mm	mm	(°)
Wide view duplex mast	2700	1950	3665	105	2/5
	3000	2100	3965	105	2/5
	3300	2250	4265	105	2/5
	3500	2350	4465	105	2/5
	3600	2400	4565	105	2/5
	4000	2650	4965	105	2/5
	4300	2790	5265	105	2/5
	4500	2900	5465	105	2/5
	4800	3095	5765	105	2/5
	5000	3195	5965	105	2/5
Full free triple mast	4000	2030	4965	1065	2/5
	4500	2150	5465	1185	2/5
	5000	2300	5965	1335	2/5
	5500	2450	6465	1485	2/5
	6000	2625	6965	1660	2/5
	6500	2800	7465	1835	2/5
	7000	3000	7965	2035	2/5
	7500	3060	8465	2095	2/5
	8000	3250	8965	2285	2/5
	8500	3420	9465	2455	2/5
	9000	3580	9965	2615	2/5
	9500	3760	10465	2795	2/5
	10000	3920	10965	2955	2/5
	10500	4100	11465	3135	2/5
	11000	4300	11965	3335	2/5

### 1.8t Mast Specification

Type	Lifting height h <sub>3</sub>	Mast lowered h <sub>1</sub>	Mast extended h <sub>4</sub>	Free lifting height h <sub>2</sub>	Tilting range α/β
	mm	mm	mm	mm	(°)
Wide view duplex mast	2700	1950	3665	110	2/5
	3000	2100	3965	110	2/5
	3300	2250	4265	110	2/5
	3500	2350	4465	110	2/5
	3600	2400	4565	110	2/5
	4000	2650	4965	110	2/5
	4300	2790	5265	110	2/5
	4500	2900	5465	110	2/5
	4800	3095	5765	110	2/5
	5000	3195	5965	110	2/5
Full free triple mast	4000	2085	4965	1120	2/5
	4500	2165	5465	1200	2/5
	5000	2315	5965	1350	2/5
	5500	2490	6465	1525	2/5
	6000	2665	6965	1700	2/5
	6500	2835	7465	1870	2/5
	7000	3020	7965	2055	2/5
	7500	3180	8465	2215	2/5
	8000	3350	8965	2385	2/5
	8500	3500	9465	2615	2/5
	9000	3600	9965	2835	2/5
	9500	3770	10465	3005	2/5
	10000	4100	10965	3135	2/5
	10500	4250	11465	3285	2/5
	11000	4450	11965	3485	2/5
11500	4700	12465	3735	2/5	

### 2.0t Mast Specification

Type	Lifting height h <sub>3</sub>	Mast lowered h <sub>1</sub>	Mast extended h <sub>4</sub>	Free lifting height h <sub>2</sub>	Tilting range α/β
	mm	mm	mm	mm	(°)
Wide view duplex mast	2700	1950	3665	110	2/5
	3000	2100	3965	110	2/5
	3300	2250	4265	110	2/5
	3500	2350	4465	110	2/5
	3600	2400	4565	110	2/5
	4000	2650	4965	110	2/5
	4300	2790	5265	110	2/5
	4500	2900	5465	110	2/5
	4800	3095	5765	110	2/5
	5000	3195	5965	110	2/5
Full free triple mast	4000	2085	4965	1120	2/5
	4500	2165	5465	1200	2/5
	5000	2315	5965	1350	2/5
	5500	2490	6465	1525	2/5
	6000	2665	6965	1700	2/5
	6500	2835	7465	1870	2/5
	7000	3020	7965	2055	2/5
	7500	3180	8465	2215	2/5
	8000	3350	8965	2385	2/5
	8500	3500	9465	2615	2/5
	9000	3600	9965	2835	2/5
	9500	3770	10465	3005	2/5
	10000	4100	10965	3135	2/5
	10500	4250	11465	3285	2/5
	11000	4450	11965	3485	2/5
11500	4700	12465	3735	2/5	
12000*	4900	12965	3935	2/5	
12500*	5150	13465	4185	2/5	
13000*	5400	13965	4435	2/5	

\* When you choose the mast, the dimensions of the truck will be affected. Please refer to the performance parameter table for details.

### 2.5t Mast Specification

Type	Lifting height h <sub>3</sub>	Mast lowered h <sub>1</sub>	Mast extended h <sub>4</sub>	Free lifting height h <sub>2</sub>	Tilting range α/β
	mm	mm	mm	mm	(°)
Wide view duplex mast	2700	1950	3665	110	2/5
	3000	2100	3965	110	2/5
	3300	2250	4265	110	2/5
	3500	2350	4465	110	2/5
	3600	2400	4565	110	2/5
	4000	2650	4965	110	2/5
	4300	2790	5265	110	2/5
	4500	2900	5465	110	2/5
	4800	3095	5765	110	2/5
	5000	3195	5965	110	2/5
Full free triple mast	4000	2085	4965	1120	2/5
	4500	2165	5465	1200	2/5
	5000	2315	5965	1350	2/5
	5500	2490	6465	1525	2/5
	6000	2665	6965	1700	2/5
	6500	2835	7465	1870	2/5
	7000	3020	7965	2055	2/5
	7500	3180	8465	2215	2/5
	8000	3350	8965	2385	2/5
	8500	3500	9465	2615	2/5
	9000	3600	9965	2835	2/5
	9500	3770	10465	3005	2/5
	10000	4100	10965	3135	2/5
	10500	4300	11465	3335	2/5
	11000	4500	11965	3535	2/5
11500	4800	12465	3835	2/5	
12000*	5000	12965	4035	2/5	
12500*	5300	13465	4335	2/5	
13000*	5600	13965	4635	2/5	

\* When you choose the mast, the dimensions of the truck will be affected. Please refer to the performance parameter table for details.

### 1.4t Residual Load Capacity Chart

Capacity(kg)	Load center distance(mm)							
	600	700	800	900	1000	1100	1200	
Lifting height (mm)	≤6000	1400	1210	1070	920	780	660	550
	6500	1300	1120	990	840	720	600	490
	7000	1200	1030	910	770	650	540	430
	7500	1100	940	830	700	580	470	370
	8000	1050	900	790	660	550	440	350
	8500	1000	850	750	620	510	410	320
	9000	900	770	670	550	450	350	260
	9500	800	680	590	480	380	290	200
	10000	700	590	510	400	310	230	150
	10500	550	450	390	300	210	130	60
11000	350	280	230	150	80	10	0	

### 1.8t Residual Load Capacity Chart

Capacity(kg)	Load center distance(mm)							
	600	700	800	900	1000	1100	1200	
Lifting height (mm)	≤6000	1800	1570	1390	1210	1050	900	780
	6500	1700	1480	1310	1130	980	840	720
	7000	1600	1390	1230	1060	910	780	660
	7500	1500	1300	1150	990	850	720	600
	8000	1450	1250	1100	950	810	690	570
	8500	1400	1210	1070	910	780	660	550
	9000	1300	1120	990	840	710	600	490
	9500	1200	1030	910	770	650	530	430
	10000	1100	940	830	700	580	470	370
	10500	950	810	710	590	480	380	290
11000	750	630	550	440	350	260	170	
11500	550	450	390	300	210	130	60	

### 2.5t Residual Load Capacity Chart

Capacity(kg)	Load center distance(mm)							
	600	700	800	900	1000	1100	1200	
Lifting height (mm)	≤6500	2500	2200	1960	1730	1530	1360	1200
	7000	2450	2150	1920	1700	1500	1330	1170
	7500	2350	2060	1840	1620	1430	1260	1110
	8000	2300	2020	1800	1590	1400	1230	1080
	8500	2250	1970	1760	1550	1360	1200	1050
	9000	2150	1880	1680	1480	1300	1140	990
	9500	2050	1800	1600	1400	1230	1080	940
	10000	1950	1710	1520	1330	1160	1010	880
	10500	1800	1570	1400	1220	1060	920	790
	11000	1500	1300	1150	1000	860	730	620
11500	1300	1130	990	850	720	610	500	
12000	1250	1080	950	810	690	580	470	
12500	1150	990	870	740	620	510	410	
13000	1000	860	750	630	520	420	330	

### 1.6t Residual Load Capacity Chart

Capacity(kg)	Load center distance(mm)							
	600	700	800	900	1000	1100	1200	
Lifting height (mm)	≤6000	1600	1390	1230	1060	920	780	660
	6500	1500	1300	1150	990	850	720	610
	7000	1400	1210	1070	920	780	660	550
	7500	1300	1120	990	840	710	600	490
	8000	1250	1080	950	810	680	570	460
	8500	1200	1030	910	770	650	530	430
	9000	1100	940	830	700	580	470	370
	9500	1000	850	750	620	510	410	320
	10000	900	770	670	550	450	350	260
	10500	750	630	550	440	350	260	170
11000	550	450	390	300	210	130	60	

### 2.0t Residual Load Capacity Chart

Capacity(kg)	Load center distance(mm)							
	600	700	800	900	1000	1100	1200</	