

INDUSTRIAL DIESEL GENERATOR SET POWERED BY **WOLING ENGINE & **SZN** ALTERNATOR**
M-WL500

POWER RATING (0.8P.F.)	STANDBY OUTPUT: 400KW/500KVA	50HZ/1500RPM/400/230V
	RATED OUTPUT: 360KW/450KVA	

CONDITIONS & DEFINITIONS
Stand-by:Code: S

Applicable for supplying emergency power at varying load in the event of normal utility power interruption.
 Fuel stop power in accordance with ISO15550, ISO3046/1, JISB8002, DIN6271 and BS5514.

Prime:Code:CP

Applicable for supplying power with varying load instead of the utility for an unlimited time. Prime power in accordance with ISO 8528.

Conditions:

Engine rating are based on SAE J1349 standard conditions are also apply at ISO3046/1, DIN6271 & BS5514 Standard conditions.

Fuel rates:Base on ASTM D975, BS2869 and on fuel oil of 35°API (16°C or 60°F) gravity having a LHV of 42,780 KJ/Kg (18,390 Btu/lb.) when used at 29°C(85°F) and weighing 838.9 g/liter (7.001lbs./U.S. gal.).

Factory Test

Each generating sets must be got through 1 hour load test for running 0%, 50%, 75%, 100% and 110% load before dispatch, All protective devices, control functions are simulated and its system checked, proved and then passed for dispatch. A test certificate can be provided upon request.

DIMENSIONS

Standard Generator Set				Open type	Silent type type
	L:	Length	mm	3800	4650
Overall dimensions	W:	Width	mm	1350	1700
	H:	Height	mm	1900	2450

Gen Set standard collection

1. Brand new heavy duty **WOLING** engine, Inline,direct,injection,4-stroke,water cooled, 6 cylinders
2. Brand new **SZN** Alternator, 4 pole, synchronic type with self excited system, Brushless, IP23, ClassH
3. **DATAKOM D300**, digital module
4. LED light installed inside of the genset
5. Vibration isolators between the engine/ alternator and base frame
6. High quality DC electronic battery charger.
7. DELIXI circuit breaker with 4pole
8. One of the top brands good quality Battery, battery tray and cable.
9. Rubber absorber for engine, radiator,alternator and control panel.
10. Adopting the high pressure fuel inlet pipe, flexible oil pipes and oil draining valve
11. Strong and big radiator with 50 degrees ,good in anti-vibration and cooling the genset.
12. Industrial silencer/muffler, its covered by heat-resist material
13. The generator set with 8hours 100% load running chassis fuel tank

14. Silent type generator, designed as most firm and strong material enclosure, polyester powder covers the enclosure that keeps the generator neither fading nor change for years, anti-corrosion.

15. English operation/maintenance manuals, test report and wiring diagram

DIESEL ENGINE: WOLING WLG450 1500RPM/50HZ

Inline,direct,injection,4-stroke,water cooled Air-Air intercooler , V12 cylinder

ENGINE SPECIFICATIONS & TECHNICAL DATA

Standby Power	KW	455
Bore x Stroke	mm	135*150
Displacement	L	25,8
Compression ratio		16:01
Oil Consumption	g/kW.h	≤0.4
Stable State Rate	%	0~5
Type of Governor		Electronic Governor
Idle Speed	rpm	750
Noise	dB	≤117
Smoke	FSN	≤1.5
Net Weight	kg	1950
Dimensions(LxWxH)	mm	1930x1686x1872

FUEL CONSUMPTION

Fuel consumption load 110%	g/Kw.h	197
Fuel consumption load 110%	L/H	108

ENGINE STANDARD EQUIPMENT

- | | |
|---|---|
| ◆ Turbo, charged & intercooled (air to air) | ◆ ELEC type governor |
| ◆ Structure steel base | ◆ Lubricating oil filter, full flow paper element |
| ◆ Crankcase breather | ◆ Lubricating oil pump, gear driven |
| ◆ Battery charging alternator | ◆ Exhaust dry manifold |
| ◆ Lubricating oil cooler | ◆ 50°C ambient radiator |
| ◆ Fuel filters, full flow paper element | ◆ Blower fan, fan drive |
| ◆ Fuel transfer pump, gear driven, plunger type | ◆ 24V DC electric starting motor |

ALTERNATOR: SZN354C 50HZ/400V/3PHASE

Standby Output: **400KW/500KVA**

Rated Output: **360KW/450KVA**

Standards

Meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000,VDE0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

Technical data

Insulation System	H
Protection Grade	IP23
Rated Power Factor	0,8
Voltage Regulation	± 1.0 %
Stator Winding	Double Layer Concentric
Winding Pitch	Two Thirds
Winding Leads	12

Connecting Type	3 Phase and 4 Wires, "Y" type connecting
Altitude	≤1000m
Exciter Type	Brushless, self-exciting
Telephone Influence Factor (TIF)	<50
THF	<2%
Voltage Regulation, Steady State	≤±1%
Alternator Efficiencies	92,30%

GENERATING SET DATA

Voltage Regulation	≥±5%
Voltage Regulation, Stead State	≤±1%
Sudden Voltage Warp (100% Sudden Reduce)	≤+25%
Sudden Voltage Warp (Sudden Increase)	≤-20%
Voltage Stable Time (100% Sudden Reduce)	≤6S
Voltage Stable Time (Sudden Increase)	≤6S
Frequency Regulation, Stead State	≤5%
Frequency Waving	≤1%
Sudden Frequency Warp (100% Sudden Reduce)	≤+12%
Sudden Frequency Warp (Sudden Increase)	≤-10%
Frequency Recovery Time(100% Sudden Reduce)	≤5S
Frequency Recovery Time (Sudden Increase)	≤5S

DATAKOM DKG 309/300 GENERATOR CONTROL MODULE FROM Turkey

Type & Design

DATAKOM DKG 309/300 is a comprehensive AMF unit for single genset standby or dual genset mutual standby operations indicating the operational status and fault conditions; automatically shutting down the engine and indicating the engine failure by means of LCD display.

Controls & Monitoring

- ◆ Mode selection & start engine button with interlock key switch system
- ◆ Menu navigation button
- ◆ LCD display for: AC amperage-each phase and earth current, AC voltage-each phase and neutral, Frequency Hz, Operation hours run, Lub, Oil pressure, Cooling water temperature, Generator load kW/Kva, Generator Load kW/Kva
- ◆ Emergency stop pushbutton
- ◆ AMF function

Safety Shutdown Protection and LED indicators

High engine temperature, Low oil pressure, Fail to start, Generator over speed / Frequency, Generator under speed / Frequency


Generator high voltage, Generator low voltage, Oil pressure sender circuit, Loss of Speed signal, Emergency stop

Mounting

Fabricated cubicle mounted on individual bracket with anti-vibration isolator

Electrical Design

In accordance with BS EN 60950 low voltage directive, BS EN 61006-2 and 61006-4 EMC directive. The optional interface can provide real time diagnostic facilities.

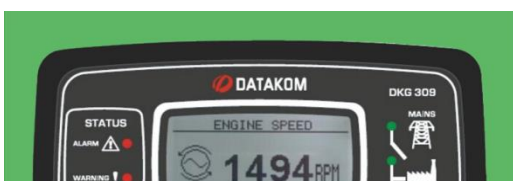

Control module DKG 309/300

- ◆ Start/stop engine optional
- ◆ Remote start
- ◆ Low oil pressure (shutdown)
- ◆ High water temp. (shutdown)
- ◆ Charge failure (shutdown)



- ◆ Over speed (shutdown)
- ◆ Over voltage (shutdown)
- ◆ Over frequency (shutdown)
- ◆ Low water level (shutdown)

GENSET'S WARRANTY

For prime using models are warranted in accordance with our warranty terms for a period of 1000 hours from date of commissioning or 12 months from date of despatch whichever date occurs the sooner.

For standby using models are warranted in accordance with our warranty terms for a period of 500 hours from date of commissioning or 24 months from date of despatch whichever date occurs the sooner.