

# SKORPYO

## BOX FRONT TIPPER

It overturns the boxes with a single control lever frontally.



AGRICULTURE



INDUSTRY



EASY



CUSTOM



HIGH PRODUCTIVITY



500 - 1000 KG



UNLOAD 120°



ANTI-CORROSION





**Helpful:** equipment suitable for handling standard box when the work space requires emptying by a frontal overturning.

**Productive:** high efficiency of the hydraulic circuit making the machine powerful, compact and fast. Assorted in two sizes, dynamic range is at the top of the category with its 1000 kg effective tested.

**Safe:** our box tippers are forged by 30 years experience and are developed with the most modern devices for a tenacious grip of the box, even in shaking operations.

**Robust:** the experience gained enables us to develop equipment for industrial environment where incidental impacts always could occur.

**Tailored:**

- Cathaphoresis anti-corrosion treatment;
- Inox version AISI 316;
- Adapters for multi-standards boxes.



## SKORPYO

**Distinctive characteristics** : It overturns the boxes with a single control lever frontally.

**Unloading angle (°)** : 120

**Materials** : Structure in non-alloy steel (S355JR)

**Finish** Painted

**Options** : - Cathaphoresis anti-corrosion treatment; - Inox version AISI 316; - \*Customizable.

**Accessories** : - Adapters for multi-standards boxes.

## RF 1000




**Weight (kg)** : 175

**Dynamic capacity (kg)** : 1000

## RF 500

**Weight (kg)** : 170

**Dynamic capacity (kg)** : 500

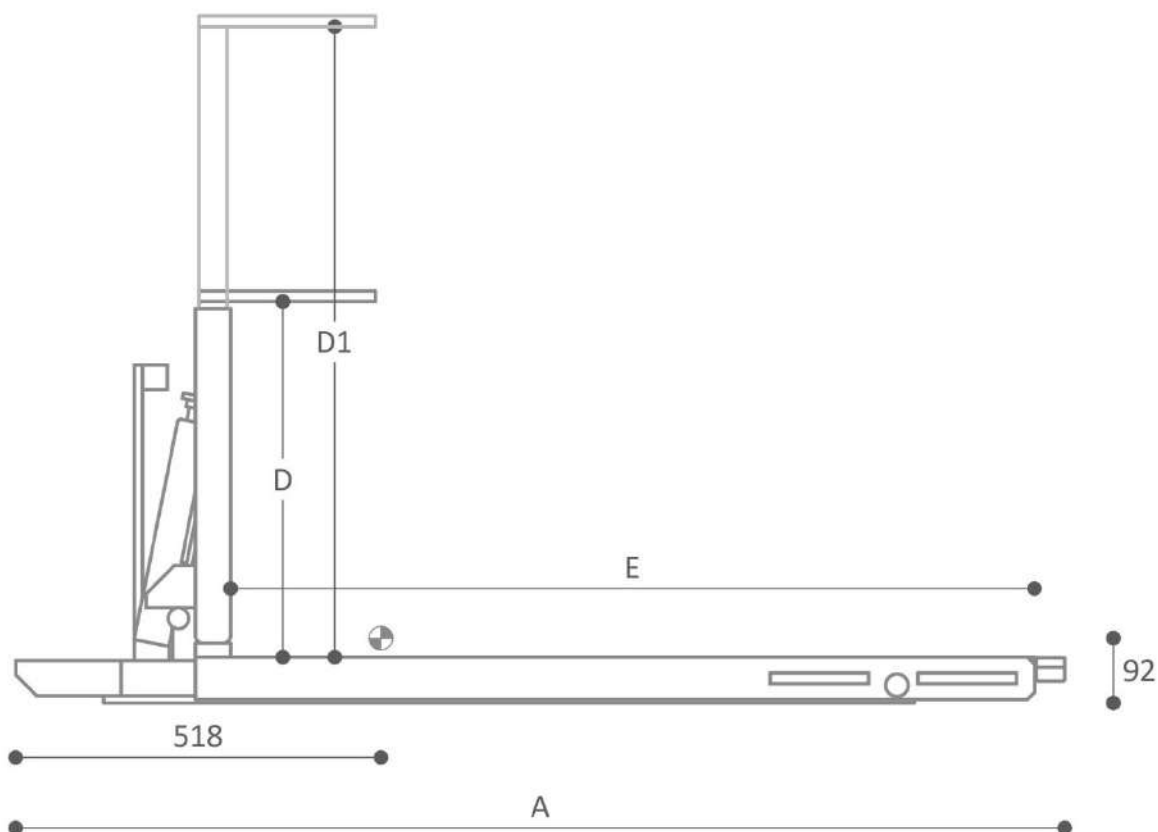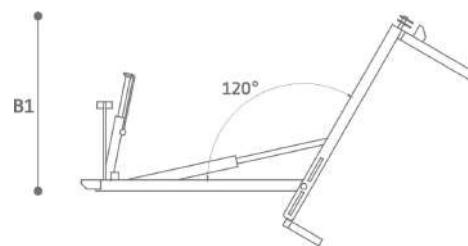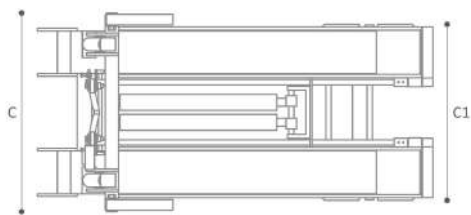

## SKORPYO

(A) Machine Length standard (mm) : 1445

(A\*) Machine Length non standard (mm) : 1520

(B1) Maximum Height (mm) : 945

(C) Shoulder Width (mm) : 745

(C1\*) Machine Width (mm) : 665

(D) Minimum Height (mm) : 470

(D1) Maximum Height (mm) : 750

(E) Working Length standard (mm) : 1140

(E\*) Working Length non std (mm) : 1215